
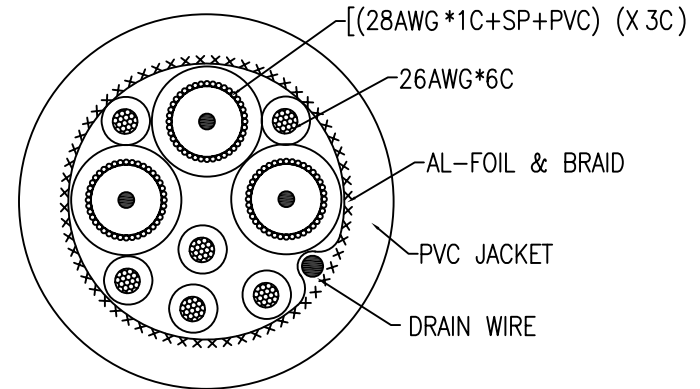


PIN OUT

P1	1	P2	1
	6		6
	2		2
	7		7
	3		3
	8		8
	11		11
	12		12
	13		13
	14		14

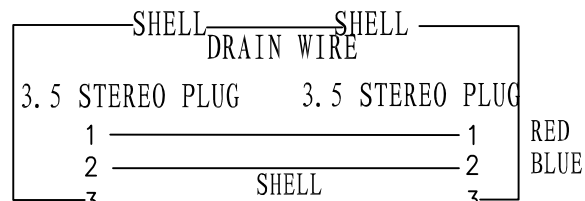

NOTES:

1.ELECTRICAL PROPERTIES:

- 1.1 100% OPEN AND SHORT TEST
- 1.2 CONDUCTOR RESISTANCE: 5 OHMS
- 1.3 INSULATION RESISTANCE: 10 MEGOHMS
- 1.4 HI-POT: DC300V/0.01S

2. ALL MATERIAL BE RoHS COMPLIANT.

NO.	PARTS NAME	Q' TY	SPECIFICATION
④	3.5mm stereo M	2PCS	NICKEL PLATED
③	HDB15 M	2PCS	NICKEL PLATED
②	CABLE	2PCS	28AWG*2C+SP+BLACK PVC JACKET OD: 3.0 ± 0.2mm
①	CABLE	1PCS	28AWG*3C+26AWG*6C+D+BLACK PVC JACKET OD: 8.5 ± 0.2mm

APPROVED	CHECKED	DRAWN	CUSTOMER:	
			ITEM NO.	RGB-7C
			DRAW NO.	
			UNIT	mm
			SCALE	NONE

DESCRIPTION:

HDB 15/M 3.5mm stereo M-HDB 15/M 3.5mm stereo M

