
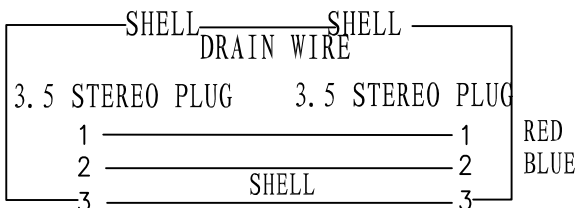



PIN OUT

P1	1	2	3	6	7	8	11	12	13	14	P2
	1	2	3	6	7	8	11	12	13	14	

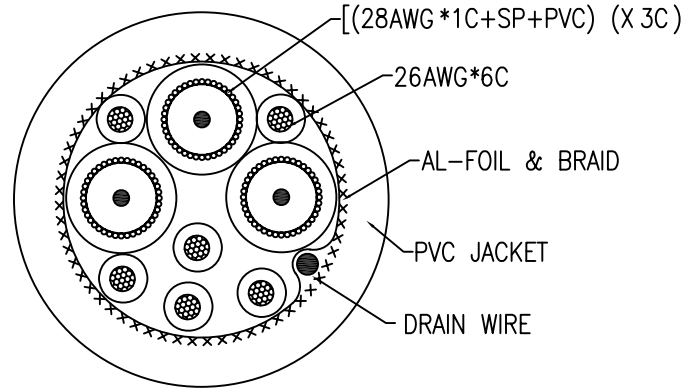

NOTES:
 1. ELECTRICAL PROPERTIES:
 1.1 100% OPEN AND SHORT TEST
 1.2 CONDUCTOR RESISTANCE: 5 OHMS
 1.3 INSULATION RESISTANCE: 10 MEGOHMS
 1.4 HI-POT: DC300V/0.01S
 2. ALL MATERIAL BE RoHS COMPLIANT.

NO.	PARTS NAME	Q' TY	SPECIFICATION
④	3.5mm stereo M	2PCS	NICKEL PLATED
③	HDB15 M	2PCS	NICKEL PLATED
②	CABLE	2PCS	28AWG*2C+SP+BLACK PVC JACKET OD: 3.0 ± 0.2mm
①	CABLE	1PCS	28AWG*3C+26AWG*6C+D+BLACK PVC JACKET OD: 8.5 ± 0.2mm

APPROVED	CHECKED	DRAWN	CUSTOMER:	DESCRIPTION: HDB 15/M 3.5mm stereo M-HDB 15/M 3.5mm stereo M	
			ITEM NO. RGB-7E		
			DRAW NO.		
			UNIT mm		
			SCALE NONE		